



# COOL-LITE® SKN ORAÉ®

*Performance meets sustainability*

The world's first low-carbon glass ORAÉ®  
combined with the best in class coatings




SAINT-GOBAIN GLASS

# COOL-LITE® SKN ORAÉ®

The highly selective solar control product family **COOL-LITE® SKN** is available on **ORAÉ®** substrate, the first low-carbon glass.

With **ORAÉ®**, Saint-Gobain Glass has achieved a landmark technical breakthrough enabling it to offer a low embodied carbon glass on the façade market thanks to a substantial R&D effort and the excellence of our industrial teams. This innovation will help to significantly reduce the carbon footprint of construction and accelerate the development of the circular economy.

Intended for use in the glazed parts of a facade, **COOL-LITE® SKN ORAÉ®** is a perfect response to the stricter sustainability requirements of the building industry without any compromise on technical or aesthetic performance.

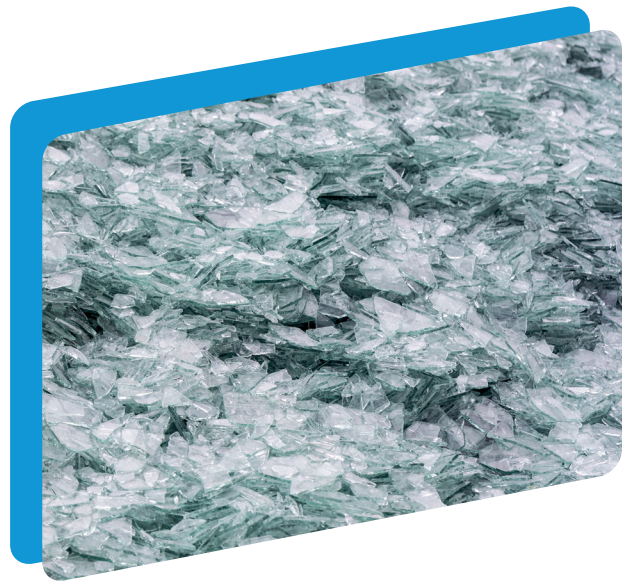

## SUSTAINABILITY

**COOL-LITE® SKN ORAÉ®** provides the best of both embodied and operational carbon levels, thanks to:

- The glass substrate **ORAÉ®**, with its low carbon footprint verified by an Environmental Product Declaration (EPD), produced by combining a very high recycled glass content (cullet) and renewable electricity.
- The excellent energy performances of the **COOL-LITE® SKN** coatings, which already drastically reduce carbon emissions generated by energy consumption, when using the building thanks to its high performance in terms of daylight intake, solar control and thermal insulation.

## PERFORMANCES

**COOL-LITE® SKN ORAÉ®** provides the **same performances and quality** as **COOL-LITE® SKN PLANICLEAR®**, with a much lower carbon footprint.



According to its verified EPD, the **ORAÉ®** substrate has a **carbon footprint of only 6.64 kg CO<sub>2</sub> eq./m<sup>2</sup>** (for a 4mm substrate), bringing a **reduction of 42%** compared to our European standard product **PLANICLEAR®**.

Coated, processed and assembled in insulated glazing unit, the reduction is then around 30% to 40%.

## RANGE

**COOL-LITE® SKN ORAÉ®** is available in standard sizes and thicknesses (4, 6, 8 and 10mm).

In complementarity to **COOL-LITE® SKN ORAÉ®** assembled in double or triple glazing, the uncoated **ORAÉ®** as well as our low-e **PLANITHERM® ORAÉ®** and **ECLAZ® ORAÉ®** are also available for the counter panes.

## AESTHETICS

**ORAÉ®** is offering exactly the **same aesthetics** than the regular clear float glass **PLANICLEAR®**. Combined with **COOL-LITE® SKN**, the low external reflection as well as the colour-neutral external appearance creates an excellent combination of function and aesthetics.

	Ug-Value <sup>1</sup>	Light Transmission (LT) <sup>2</sup>	Solar Factor (g-value) <sup>2</sup>	Selectivity (LT/g)	Outside reflection (LRe) <sup>2</sup>	Inside reflection (LRI) <sup>2</sup>	Carbon footprint (GWP) <sup>3,4</sup>	Carbon reduction vs. PLANICLEAR® <sup>3,4</sup>
	[W/m <sup>2</sup> K]	[%]	[%]	[%]	[%]	[%]	[kg CO <sub>2</sub> eq./m <sup>2</sup> ]	[%]

Standard build-up double glazing unit (DGU) 6/16/4 mm - coating on face 2, 90% Argon

COOL-LITE® SKN 183 <b>ORAÉ®</b>	1.0	75	40	1.88	12	13	24	-39%
COOL-LITE® SKN 183 II <b>ORAÉ®</b>	1.0	75	40	1.88	12	13	28	-36%
COOL-LITE® SKN 175 II <b>ORAÉ®</b>	1.0	70	35	2.00	14	15	28	-36%
COOL-LITE® SKN 176 <b>ORAÉ®</b>	1.0	70	37	1.89	13	15	24	-39%
COOL-LITE® SKN 176 II <b>ORAÉ®</b>	1.0	70	37	1.89	13	15	28	-36%
COOL-LITE® SKN 165 <b>ORAÉ®</b>	1.0	61	34	1.79	16	19	24	-39%
COOL-LITE® SKN 165 II <b>ORAÉ®</b>	1.0	61	34	1.79	16	19	28	-36%
COOL-LITE® SKN 154 <b>ORAÉ®</b>	1.0	52	28	1.86	18	23	24	-39%
COOL-LITE® SKN 154 II <b>ORAÉ®</b>	1.0	52	28	1.86	18	23	28	-36%
COOL-LITE® SKN 144 II <b>ORAÉ®</b>	1.1	42	23	1.83	20	15	28	-39%

<sup>1</sup> according to EN673

<sup>2</sup> according to EN410

<sup>3</sup> Global Warming Potential (GWP A1-A3 Stages) values with **PLANICLEAR®** and **ORAÉ®** are calculations made with Calumen® for each composition of insulated glazing unit (IGU) on the basis of the standard EN 15804+A2. Detailed environmental data are documented in the available Environmental Product Declarations (EPD) of **PLANICLEAR®** and **ORAÉ®**. Only complete EPD can be verified by an external third party.

<sup>4</sup> All panes of the DGU with the same substrate; first pane respectively annealed or tempered (II) with the same glass compositions; counter panes always annealed.



SAINT-GOBAIN GLASS

Saint-Gobain Tower  
12 place de l'Iris  
92400 • Courbevoie  
France

glass.facade@saint-gobain.com  
www.saint-gobain-glass.com



DISCOVER  
AND TRY  
CALUMEN®



CHECK OUR  
EPD OF  
ORAÉ® (4mm)



CHECK OUR  
EPD OF COATED  
ORAÉ® (6mm)

SAINT-GOBAIN GLASS